

HOOK switch

Telephone
Hook Switch

MODEL NO.
2240 Series

Features

- Using slide Contact enhances reliability
- Various actuator lever style.
- Low profile with thickness of 8mm

Applications

- All telephone.
- video phone equipments.



Main Specifications

Rating	0.2A 48V DC
Contact Resistance	100mΩ Max.
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)
Operating Force	70gf Max.
Operating Life	100,000 Cycles

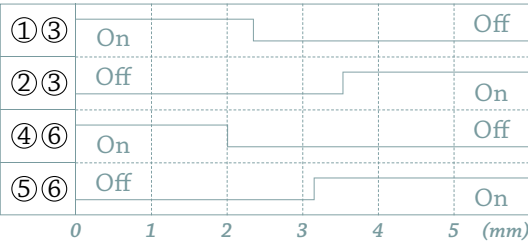
Subsidiary Production Code


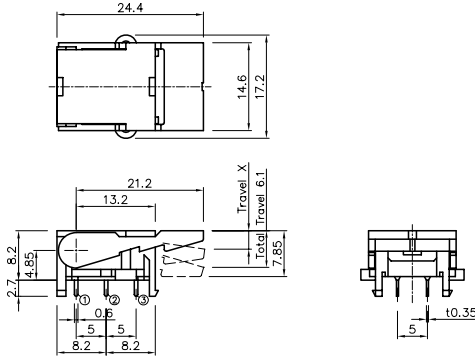



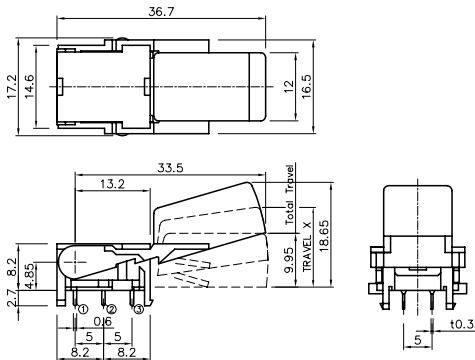



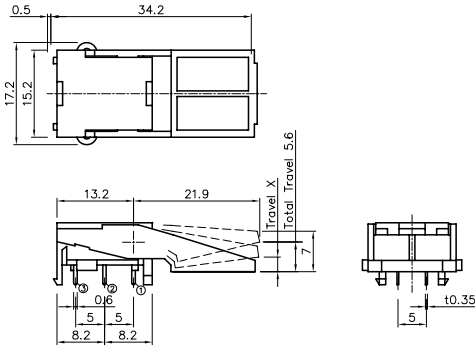



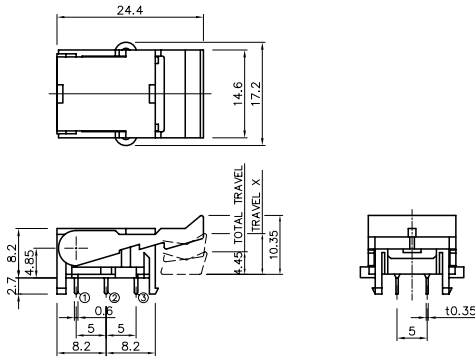

Code number	Operating Type	Lever Type	Drawing
2240	-	Standard	1
2240A		A LEVER	2
2240B	Reverse	B LEVER	3
2240C	-	C LEVER	4

► Bulk or Tray packing type

Time Lag Diagram

Travel Position (x)



No.	3D	Dimension Type	P.C.B pattern dimension
1		Unit : mm 	
			Circuit Diagram 
2		Unit : mm 	
			Circuit Diagram 
3		Unit : mm 	
			Circuit Diagram 
4		Unit : mm 	
			Circuit Diagram 