

TACT switch

Surface
mount Type (7 X 2.5 mm)


MODEL NO.
1188 Series

Features

- Surface mount type tact switch.
- Outline dimension 7mm x 2.5mm
- Dust & Moisture protective structure.
- Horizontal operating direction

Applications

- Level controls for car audio & navigation system.
- Various controls for devices in automotive.
- Controls for image/sound devices, radio equipment.
- Operating signal input switches, etc.



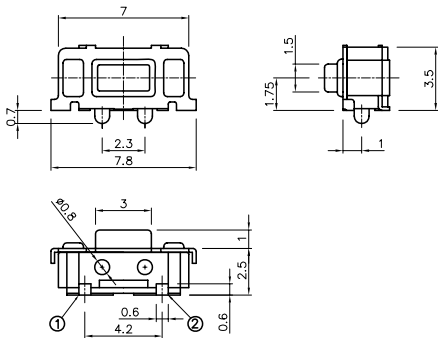


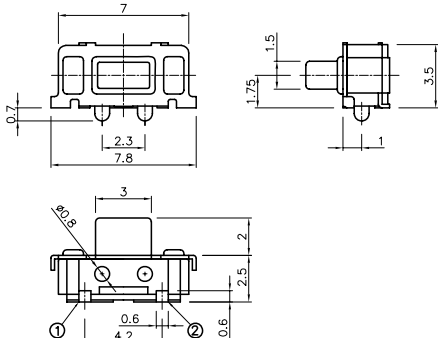


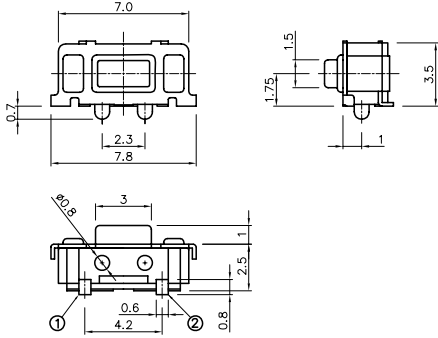


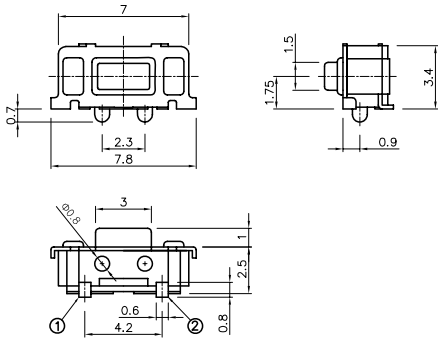

Main Specifications

Rating	50mA 12V DC	
Travel	0.25±0.1mm	
Contact Resistance	100 mΩ max.	
Operating temperature	-20℃ ~ 70℃(45% ~ 85% RH)	
Bounce	10 m sec max.	
Operating Force	160gf	250gf
Operating Life	50,000 Cycles	30,000 Cycles

Subsidiary Production Code

Code number	Operating direction	Terminal length	Case Boss length	Knob Length	Drawing
1188	Horizontal	0.6mm	Without	1mm	1
1188E			0.7mm		2
1188EB		2mm		3	
1188EL		1mm		4	
208GS			5		

No.	3D	Dimension Type	P.C.B pattern dimension
1188			
1			 Circuit Diagram

No.	3D	Dimension Type	P.C.B pattern dimension
2		Unit : mm 	
			Circuit Diagram 
3		Unit : mm 	
			Circuit Diagram 
4		Unit : mm 	
			Circuit Diagram 
5		Unit : mm 	
			Circuit Diagram 